

RAWCELL® Metal - FPA (6,35/19)(0,5-0,5)S(1)

Description of the product

FPA is a sandwich panel without a cosmetic finish, with an aluminium honeycomb core and skins made of galvanised or primed sheet steel. Main fields of application: construction, furniture, lifts, shipbuilding, railway, road.

Layers

1) INTERNAL CORE


aluminium honeycomb
(Starcell production)
aluminium alloy: 3000 series
density: 29 - 40 - 56 - 65 - 80 kg/m³
cell diameter:
6.35 mm (standard);
10 - 12.7 - 19 mm (on request)

2) ADHESIVE

thermoplastic or polyurethane

3) EXTERNAL SKINS

raw or primed galvanized steel sheet
skin thicknesses:
0.3 - 0.5 - 0.6 mm (standard)
0.8 - 1.0 mm (on request)

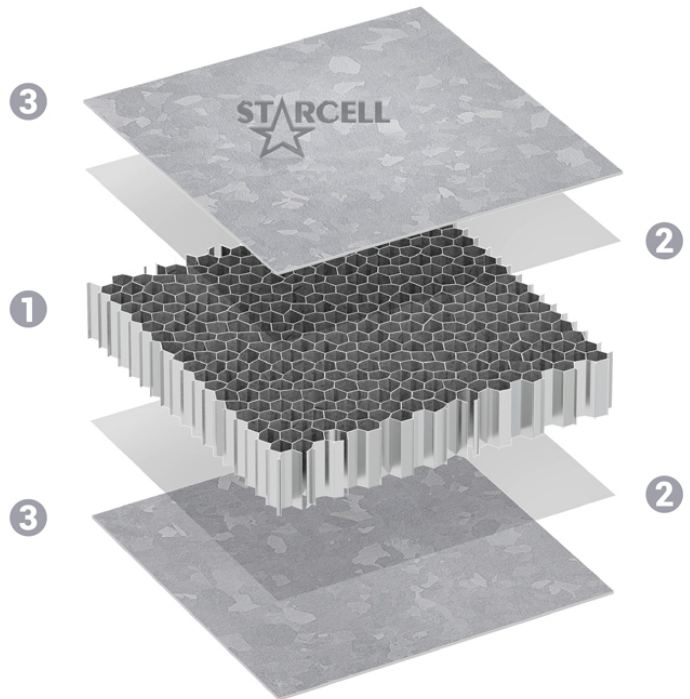

Technical sheet of the panel

PRODUCT ID CODE

| Code structure | Value in this sheet | Meaning |
|----------------|---------------------|---|
| RAWCELL® | | family to which the product belongs |
| Metal | | subfamily to which the product belongs |
| FPA (n/n)(n-n) | | panel type |
| FPA (n/)() | 6,35/ = | size (mm) of the hexagonal honeycomb cell |
| FPA (/n)() | /19 = | panel thickness (mm) |
| FPA (/)(n-n) | 0,5-0,5 | thickness (mm) of the two skins |
| S(n) | 1= | standard dimensions (mm) - S(1) = 1.000 X 1.000 |

CHARACTERISTICS OF MATERIALS AND COMPONENTS

Structural skins

| | |
|----------------------------|--|
| material: | steel sheet |
| type: | hot dip galvanized |
| standard thicknesses (mm): | 0,3 - 0,5 - 0,6 (squared); 0,8 - 1,0 (not squared) |
| surface appearance: | raw - primed |
| standard adhesive: | thermoplastic - polyurethane |

Hexagonal cell honeycomb

| | |
|-------------------------------|------------------------|
| material: | aluminium foil |
| type: | 3000 series alloy |
| foil thicknesses (µm): | 50 - 60 - 70 |
| density (kg/m ³): | 29 - 40 - 56 - 65 - 80 |
| standard cell sizes (mm): | 6,35 |
| on request cell size (mm): | 10 - 12,7 - 19 |

PHYSICAL AND DIMENSIONAL CHARACTERISTICS OF THE PANEL

Dimensions

| | |
|-----------------|---|
| standard (mm): | S(3) = 1.000 X 2.150 - S(7) = 1.250 X 2.550 - S(12) = 1.500 X 3.050 |
| special (mm): | 1.500 - maximum length: 4.300 |
| tolerance (mm): | ± 1 (squared panels) |

Thicknesses

| | | | | | | | |
|-----------------|--------------|----|------|----|----|----|----|
| standard (mm): | 5 | 10 | 12,7 | 15 | 20 | 25 | 30 |
| special (mm): | from 4 to 60 | | | | | | |
| tolerance (mm): | ± 0,3 | | | | | | |

Weights*

| | | | | | | | |
|--|-------|------|------|------|------|------|------|
| weights referred to standard thicknesses (kg/m ²): | 5,44 | 5,71 | 5,85 | 5,98 | 6,25 | 6,52 | 6,79 |
| tolerance (kg/m ²): | ± 0,2 | | | | | | |

*The weights refer to panels with the following characteristics:

cell size (mm): 10

foil thickness (µm): 70

thickness of the skins (mm): 0,3

MECHANICAL CHARACTERISTICS OF THE PANEL

The characteristics of this sheet refer to the following type of panel:

RAWCELL® Metal - FPA (6,35/19)(0,5-0,5)S(1)

Starcell's Technical Department will gladly work with customers to determine the features of other panel configurations

| Type | Standard | Characteristic value | | | | | | |
|---|---------------------|--|----|------|----|---------|----|----|
| standard thicknesses | - | 5 | 10 | 12,7 | 15 | 20 | 25 | 30 |
| maximum load* (N): | DIN 53293; EN 14125 | | | | | 3.900 | | |
| deflection at Max* load (mm): | DIN 53293; EN 14125 | | | | | 3,58 | | |
| resistance to peeling* (N): | DIN 53295 | > 130 (min.) - >380 (average) | | | | | | |
| compressive strength* (Kg/cm ²): | UNI 4913 | 27 | | | | | | |
| elasticity modulus (E)* (N/mm ²): | DIN 53293 | | | | | 130.000 | | |
| stiffness modulus (R)* (N/m ²): | DIN 53293 | 1.000 | | | | | | |
| thermal expansion coefficient* (°C ⁻¹): | - | 1,2x 10 ⁻⁵ | | | | | | |
| operating temperature (°C): | | from -40 °C to +75 °C (on request +120 °C) | | | | | | |

(*) values obtained by Starcell's Internal Laboratory.

CERTIFICATIONS

| Type | Standard | Sector | Class |
|---------------------------------|-------------------------------------|--------------|-----------|
| fire behaviour of the panel | EN 13501-1 | CIVIL | A2-s1, d0 |
| fire behaviour of the panel | IMO Res. MSC.307(88) - 2010FTP Code | SHIPBUILDING | C |
| fire behaviour of the panel | UNI 11170-3 | RAIL | M1 F0 |
| fire behaviour of the honeycomb | ISO 1182 | | 0 |

PROPERTIES

- Very high resistance to bending, shear and tensile stress.
- Excellent dimensional stability, also in terms of flatness over time.
- Very good compressive strength (due to aluminium honeycomb).
- Excellent ratio between mechanical performance (high) and weight (content).
- Excellent weather resistance.
- Ideal for outdoor applications due to its excellent resistance to aggressive weather.
- Ease of machining with manual or CNC equipment suitable for machining steel.
- Excellent fire resistance and low emission of toxic fumes.
- Wide operating temperature range (from -40 °C to +120 °C).

FIELDS OF APPLICATION

The RAWCELL® Metal - FPA panel is widely used in the most varied fields of application, thanks to its particular characteristics: low weight, high rigidity and flatness, excellent mechanical properties, fire resistance, no toxic fumes and dimensional stability over time. In the civil engineering sector (lift, construction) and in transport, it is used for flooring, subdivision of cabins, ventilated façades. The total recyclability of the panel, being entirely made of metal, makes it usable also wherever regulations or commitment to environmental protection are an essential constraint.

STORAGE

The RAWCELL® Metal - FPA panel is a product in the "semi-finished products" category and therefore is subject to further processing; we recommend storing the panels horizontally in a closed and dry environment, possibly away from heat sources and to support them along their edges.

SAFETY DATA SHEETS

On request, safety data sheets for this product are available in Italian or English. For more information, please visit: www.starcellspa.com.

Scheda tecnica aggiornata al 19-09-2019